

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
9 September 2005 (09.09.2005)


PCT

(10) International Publication Number
WO 2005/081734 A2

- (51) International Patent Classification: Not classified (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (21) International Application Number: PCT/US2004/004952
- (22) International Filing Date: 19 February 2004 (19.02.2004)
- (25) Filing Language: English
- (26) Publication Language: English
- (71) Applicant (for all designated States except US): OTIS ELEVATOR COMPANY [US/US]; Ten Farm Springs Road, Farmington, CT 06032 (US).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): RIVERA, Jim, A. [US/US]; 14 Litchfield Lane, Bristol, CT 06019 (US).
- (74) Agent: SIRAGUSA, John, M.; Carlson, Gaskey & Olds, 400 West Maple Road, Suite 350, Birmingham, MI 48009 (US).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declaration under Rule 4.17:**
— of inventorship (Rule 4.17(iv)) for US only

[Continued on next page]

(54) Title: ELEVATOR RAIL SUPPORT BRACKET

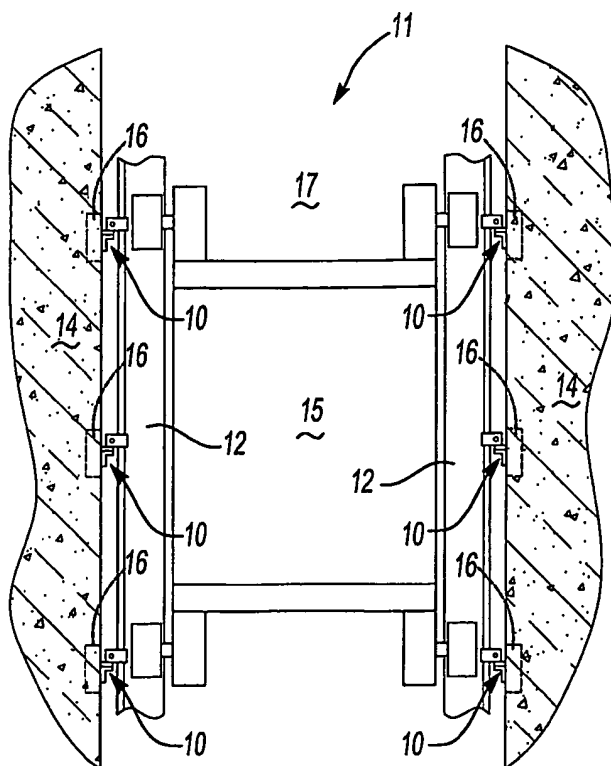

(57) Abstract: A mounting bracket for a guide rail (12) includes first and second clips (20A, 20B) secured to a mount (18). The first and second clips (20A, 20B) establish a clamping dimension (32) when they are received about a flange (38) of the guide rail (12). The mount (18) secures to a hoistway wall (14). A bolt (22) and nut (24) adjustably secure the clips (20A, 20B) in a spaced relationship to each other around the flange (38). Adjustment of the clamping distance (32) provides for mounting various sized guide rails (12) with a common sized mounting bracket (10). The clips are also selectively moveable relative to the mount to facilitate plumbing the guide rail (12) within the hoistway (14).



Published:

- without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.